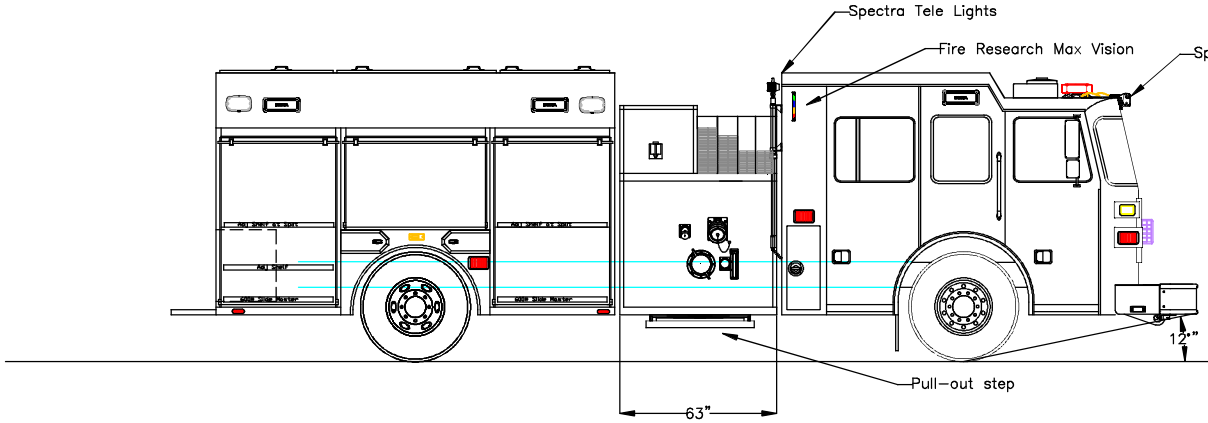


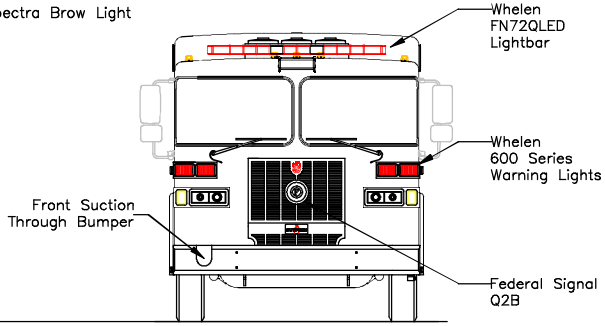


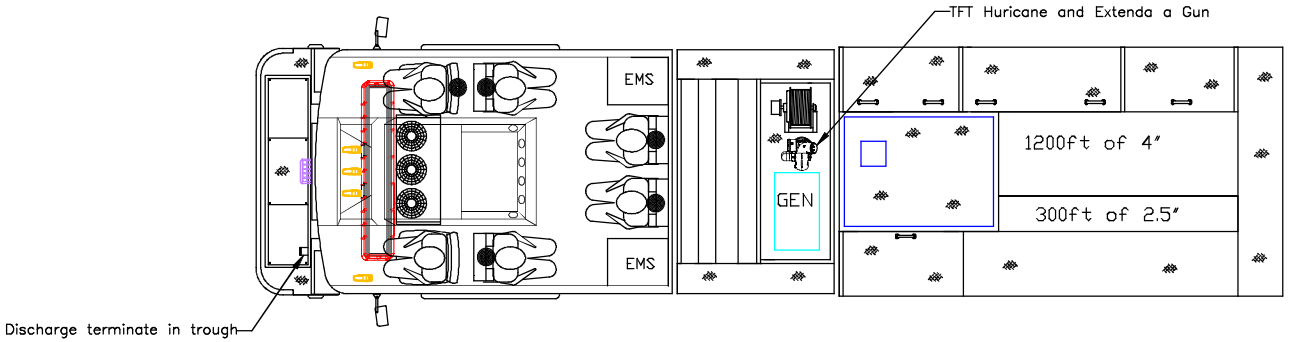


| Left Side Compartmentation | | | | |
|---|---|---|---|---|
| Compt | Doors | Opening Dimensions | Inside Dimensions | Volume |
| L1 | Roll Up | 46x60 | 50x71x24.25 | 50.5 CU FT |
| L2 | Roll Up | 56x28 | 60x37x24.25 | 60.6 CU FT |
| L3 | Roll Up | 46x60 | 50x71x24.25 | 48.5 CU FT |
| **Right Side Compartmentation** | | | | |
| Compt | Doors | Opening Dimensions | Inside Dimensions | Volume |
| R1 | Roll Up | 46x60 | 50x71x24.25/10 | 32.9 CU FT |
| R2 | Roll Up | 56x28 | 60x37x10 | 12.8 CU FT |
| R3 | Roll Up | 46x60 | 50x71x24.25/10 | 31.6 CU FT |
| **Rear Compartmentation** | | | | |
| Compt | Doors | Opening Dimensions | Inside Dimensions | Volume |
| A1 | Roll Up | 44x18x24 | 48x27x24 | 18 CU FT |
| **Coffin Compartmentation** | | | | |
| Compt | Doors | Opening Dimensions | Inside Dimensions | Volume |
| | Hatch | 157x26 | 157x26x20 | 53.4 CU FT |
| | | | Total Volume | 310 CU Ft |

Hale QMax 1750 GPM Pump
1000 Gal Water Tank

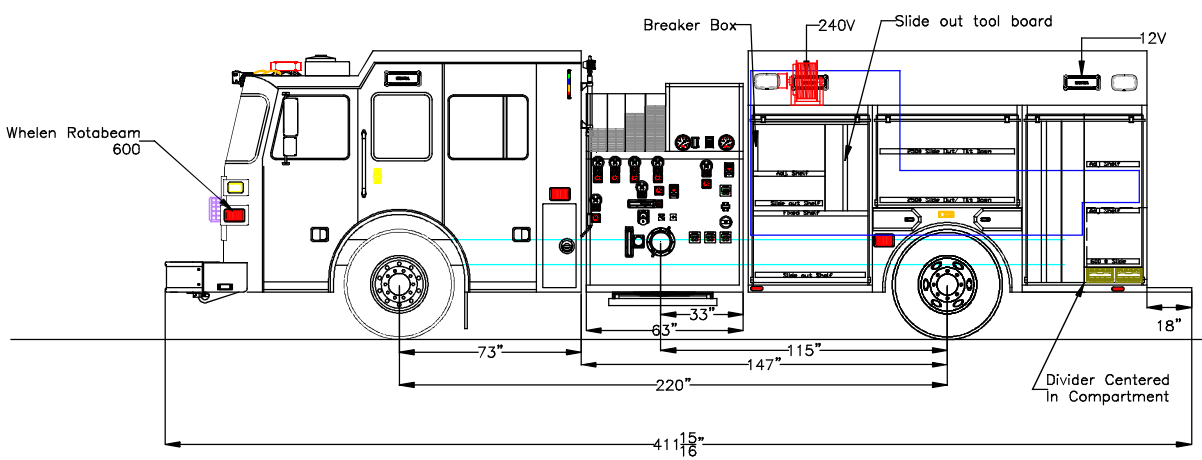


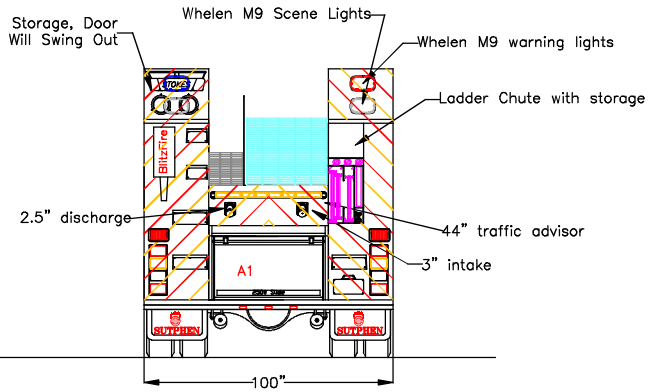


DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.

DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.

CUSTOMER APPROVAL

NAME:

TITLE:

DATE:

| REV. | DESCRIPTION | BY | DATE |
|---|---|---|---|
| | | | |

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.

DRAWN BY: B. Finnegan

DATE: 07/10/2015

MFG. FACILITY: SUTPHEN EAST WHITE LAKE, NY

SUTPHEN

Clay Fire Dept.
Clay, NY

SS Pumper

DWG. NO.: