

SPECIFICATION

CHASSIS:
 -INTERNATIONAL HV607 SBA REGULAR CAB 6x4
 -68,000 LB GVWR; 22,000 LB FRONT / 46,000 LB REAR
 -DIESEL ENGINE CUMMINS L9, EPA2017, 450 HP
 -AUTOMATIC TRANSMISSION, ALLISON 3000 EVS

PUMP:
 -HALE MIDSHIP QMAX1500
 -1500 USGPM (5678 LPM) (1249 IGPM) AT 150 PSI
 -THIRD PARTY CERTIFICATION MEETING NFPA 1901-2016 EDITION




PLUMBING: STAINLESS STEEL SCHEDULE 10
 -2 x 6" SUCTION, (1)ROAD (1)CURB
 -2 x 2 1/2" GATED SUCTION, (1)ROAD (1)CURB
 -4 x 2 1/2" DISCHARGE PORT, (2)ROAD (2)CURB
 -2 x 1 1/2" CROSS LAYS
 -1 x 2 1/2" CROSS LAY
 -1 x 6" STORZ SUCTION W/4" PLUMBING - ELECTRIC
 -1 x 4" STORZ DISCHARGE (3" PLMBG) W/SLO CLOZ, (1)CURB
 -1 x 1 1/2" FRONT DISCHARGE
 -1 x 3" MONITOR STANDPIPE W/SLO CLOZ
 -1 x 4" STORZ EXTERNAL TANK FILL FIREMAN'S FRIEND, (1)REAR
 -2 x 4" TANK TO PUMP W/4" AKRON BALL VALVE - HANDWHEEL
 -2" TANK FILL

TANK:
 -3000 USG WATER TANK

BODY:
 -DRY SIDE TANKER, EXTRUDED ALUMINUM HIGH/HIGH
 -BODY UNDERCOATING CORASHIELD

EMERGENCY EQUIPMENT/ACCESSORIES:
 - SEE SPECIFICATION FOR DETAILS

BODY TYPE: EXTRUDED ALUMINUM
TANK TYPE: DRY SIDE

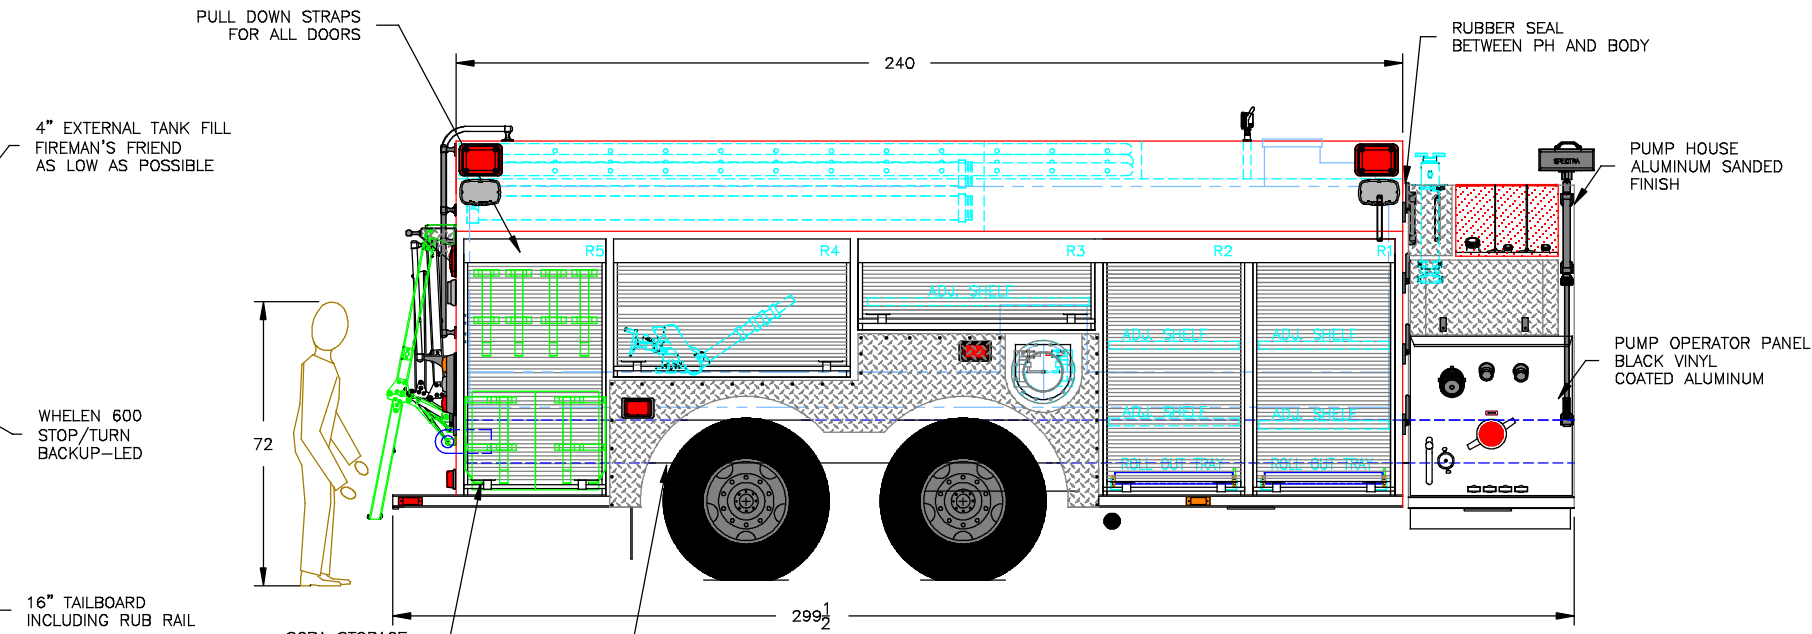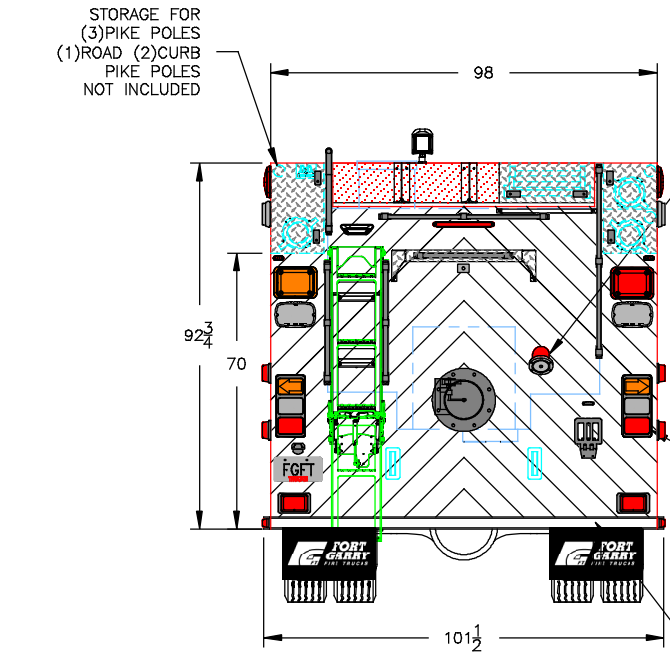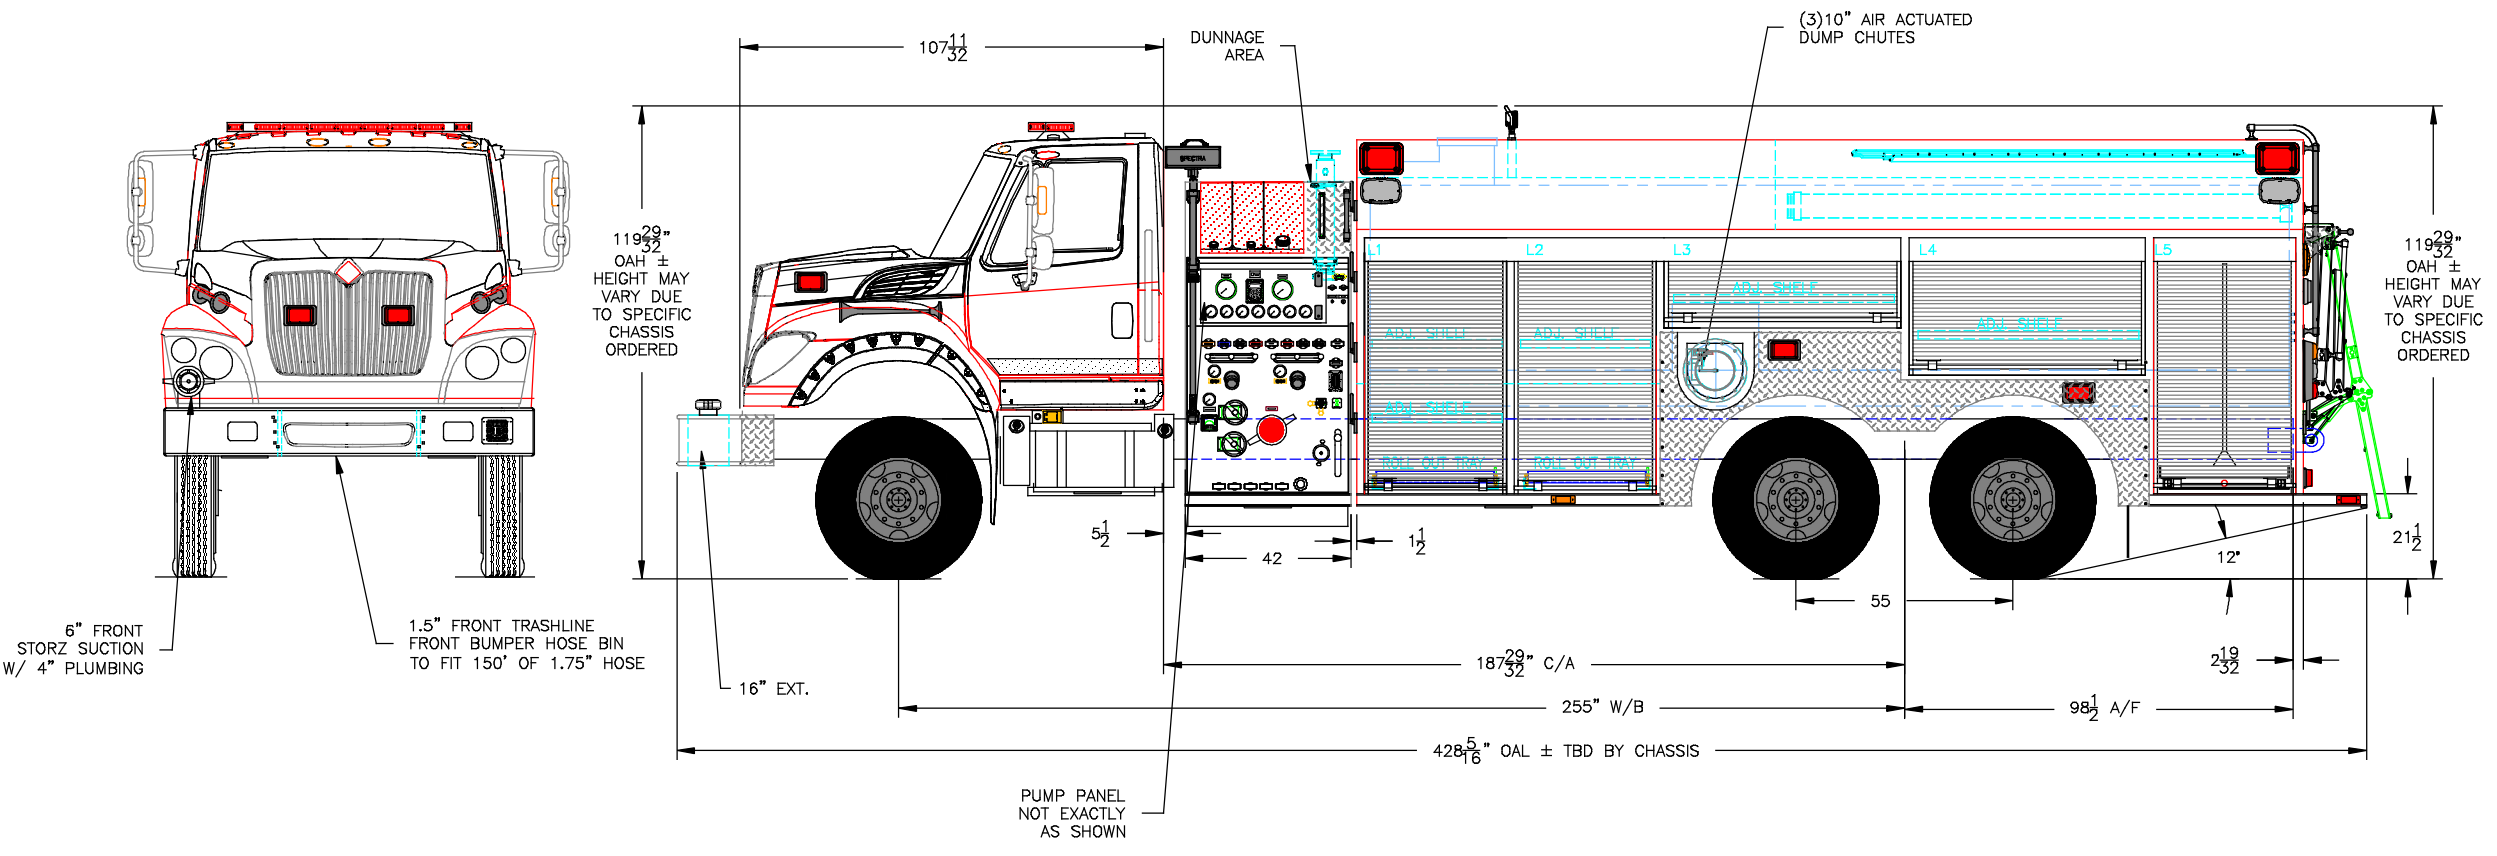

COMPT.	COMPARTMENT FRAME DIMENSIONS
L1/R1	36W x 65H x 13.5/26D
L2/R2	36W x 65H x 13.5/26D
L3/R3	60W x 23H x 13.5D
L4/R4	60W x 35H x 13.5/26D
L5/R5	36W x 65H x 13.5/26D

1. THE DRAWING IS FOR REFERENCE PURPOSE, ONLY. THE DRAWING MAY OR MAY NOT SHOW ALL ITEMS AS DESCRIBED IN THE WRITTEN DETAILED SPECIFICATION.
2. INCLUSION OF AN ITEM ON THE DRAWING DOES NOT CONSTITUTE INCLUSION OF THAT ITEM WITH THE FINAL DELIVERY OF THE UNIT. SPECIFICATION SHALL BE FINAL AUTHORITY TO BE DETERMINED WHAT IS SUPPLIED ON THE APPARATUS.
3. THE EFFECTIVE DOOR OPENING FOR ROLLUP DOORS WILL BE REDUCED APPROX. 10" IN HEIGHT, 2" IN DEPTH AND 2" IN WIDTH FROM SHOWN FRAME OPENINGS AND 2" IN HEIGHT, 3" IN DEPTH AND UP TO 4" IN WIDTH FOR PAN DOORS. DIMENSIONS TOLERANCE ± 1/4"
4. PUMP RATING AND TANK CAPACITY ARE SHOWN AS NOMINAL VALUES. THE ACTUAL VALUES MAY VARY.
5. CHASSIS GVWR SHOWN IS THE MINIMUM REQUIRED FOR STANDARD BODY DEPENDING OF OPTIONS, GVWR MAY NEED TO BE INCREASED.
6. COMMERCIAL OEM CAB STEPS MAY NOT MEET ULC STANDARD. SELECT CUSTOM STEPS WHEN REQUIRED
7. OVERALL HEIGHT IS IN LOADED CONDITION, UNLOADED HEIGHT MAY BE 4" ABOVE HEIGHT SHOWN. AFTER TRUCK IS COMPLETED ADDITIONAL STEPS MAY BE REQUIRED TO MEET THE STANDARD.
8. DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO CHANGE AS MAY BE FOUND NECESSARY DURING DESIGN. DO NOT SCALE DRAWING.
9. MINOR DETAILS AND REFLECTIVE STRIPING ARE NOT SHOWN.

THIS DRAWING IS PROPERTY OF FORT GARRY FIRE TRUCKS LTD (FGFT) AND MUST NOT BE COPIED OR REPRODUCED IN WHOLE OR IN PART, BY ANY METHOD WHATSOEVER, WITHOUT AUTHORIZATION OF FGFT.



WWW.FGFT.COM
WINNIPEG, MANITOBA, CANADA 1-800-565-3473

DESCRIPTION:	HOPE VFD	
SCALE:	1:50	DWG. BY: JAR
		CHK. BY:

MODEL:	APTTS25H6	SHEET:	1 OF 1
DATE:	25 SEP 2019	DWG. NO. :	19SS38

B	REVISED QUOTE DRAWING	JAR	04 NOV 2019
A	QUOTE DRAWING	JAR	25 SEP 2019
REV	DESCRIPTION OF CHANGE	BY	DATE