

CUSTOMER APPROVAL	IF NOT RETURNED TO FGFT BY THE DATE INDICATED BELOW, WE WILL PROCEED WITH FABRICATION AS PER THE DRAWING
SALES SIGNATURE:	
CUSTOMER SIGNATURE:	
DATE:	
RETURN TO FGFT BY:	DATE: 18 DEC 2021
REVIEWED BY:	
REVIEW DATE:	
ACCEPTED AS IS:	<input type="checkbox"/>
ACCEPTED WITH REVISION NOTED:	<input type="checkbox"/>
REVISE AS NOTED AND RE-SUBMIT:	<input type="checkbox"/>

BODY TYPE: EXTRUDED ALUMINUM
TANK TYPE: DRY SIDE

DOC. NO. : E018-1 DRAWING TEMPLATE
REV. C 2017-02-05

SPECIFICATION

CHASSIS:
-FREIGHTLINER M2 112 CREW CAB 6x4
-60700 LB GVWR; 14700 LB FRONT / 46,000 LB REAR
-DIESEL ENGINE, CUMMINS L9 450EV HP
-AUTOMATIC TRANSMISSION, ALLISON 3000 EVS
-CHASSIS SUPPLIED ANTI ROLL STABILITY

PUMP:
-HALE MIDSHIP DSD1500
-1500USGPM (5700 LPM) (1250 IGPM) AT 150 PSI & 500 USGPM
-ULC TESTED BY INDEPENDENT 3rd PARTY MEETS NFPA 1901-2016




PLUMBING:
- 2 x 6" SUCTION, (1)ROAD (1)CURB
- 1 x 2 1/2" GATED SUCTION, (1)ROAD
- 3 x 2 1/2" DISCHARGE PORT, (2)ROAD (1)CURB
- 1 x 2 1/2" DISCHARGE HOSE BED PRECONNECT, (1)REAR
- 1 x 4" STORZ DISCHARGE, 4" PLUMBING ELECTRIC (1)CURB
- 1 x 4" STORZ EXTERNAL TANK FILL FIREMAN'S FRIEND (1)REAR
- 1 x 4" STORZ SUCTION W/6" FITTING, AKRON ELECTRIC, (1)FRONT
- 1 x 2 1/2" CROSSLAY
- 2 x 1 1/2" SPEEDLAYS
- 1 x 4" TANK TO PUMP, W/3" BUTTERFLY VALVE
- 2" TANK FILL AKRON

TANK:
-2400 USG (2000 IG) WATER TANK

BODY:
-PUMPER TANKER ALUMINUM HIGH/HIGH
-BODY UNDERCOATING - CORASHIELD

EMERGENCY EQUIPMENT/ACCESSORIES:
- LIGHT BAR IV 55" LED
- SIREN SMART
- SPEAKER
- 2 x FLOOD LIGHTS
- 1 x HAND HELD SPOT LIGHT IN CAB
- 2 x BEACONS
- 2 x GRILLE LIGHTS RED
- 8 x LWR WARNING LIGHTS RED
- 8 x GROUND LIGHTS
- 6 x SCENE LIGHTS
- AIR CHARGING PROVISION
- BATTERY CHARGING PROVISION
- ANTENNA MOUNT
-10' ATTIC LADDER
-14' ROOF LADDER
-35'(3)SECTION EXTENSION LADDER
-(2) 6"x10' SUCTION HOSE

MODEL:
WHELEN FREEDOM IV
WHELEN CEN COM+EQ2B
WHELENSA315P+BP200EF
DTI 010Wx6 LED
OPTRONIC
WHELEN L31HRFN RED
WHELEN 600 LED
LUMA BAR H20-12"
KUSSMAUL
AUTO CHARGE 40/20
DUO SAFETY 585-A
DUA SAFETY 775-A
DUO SAFETY 1225-A

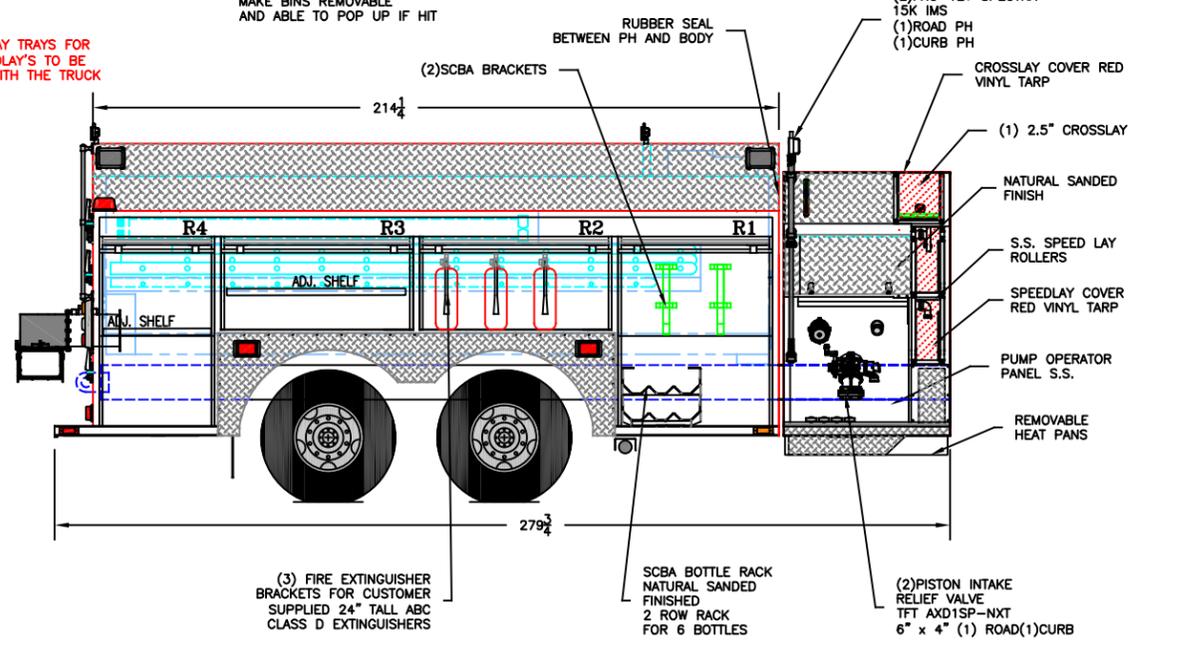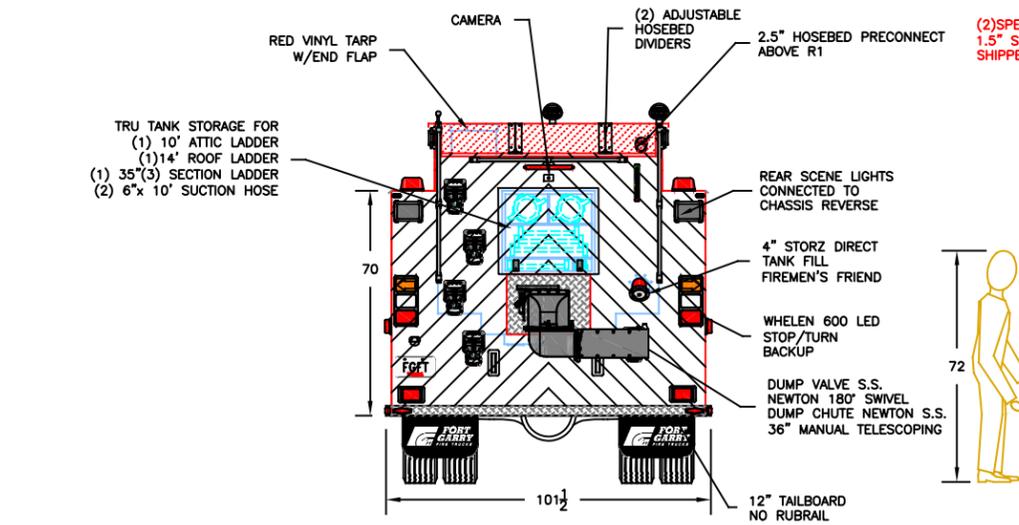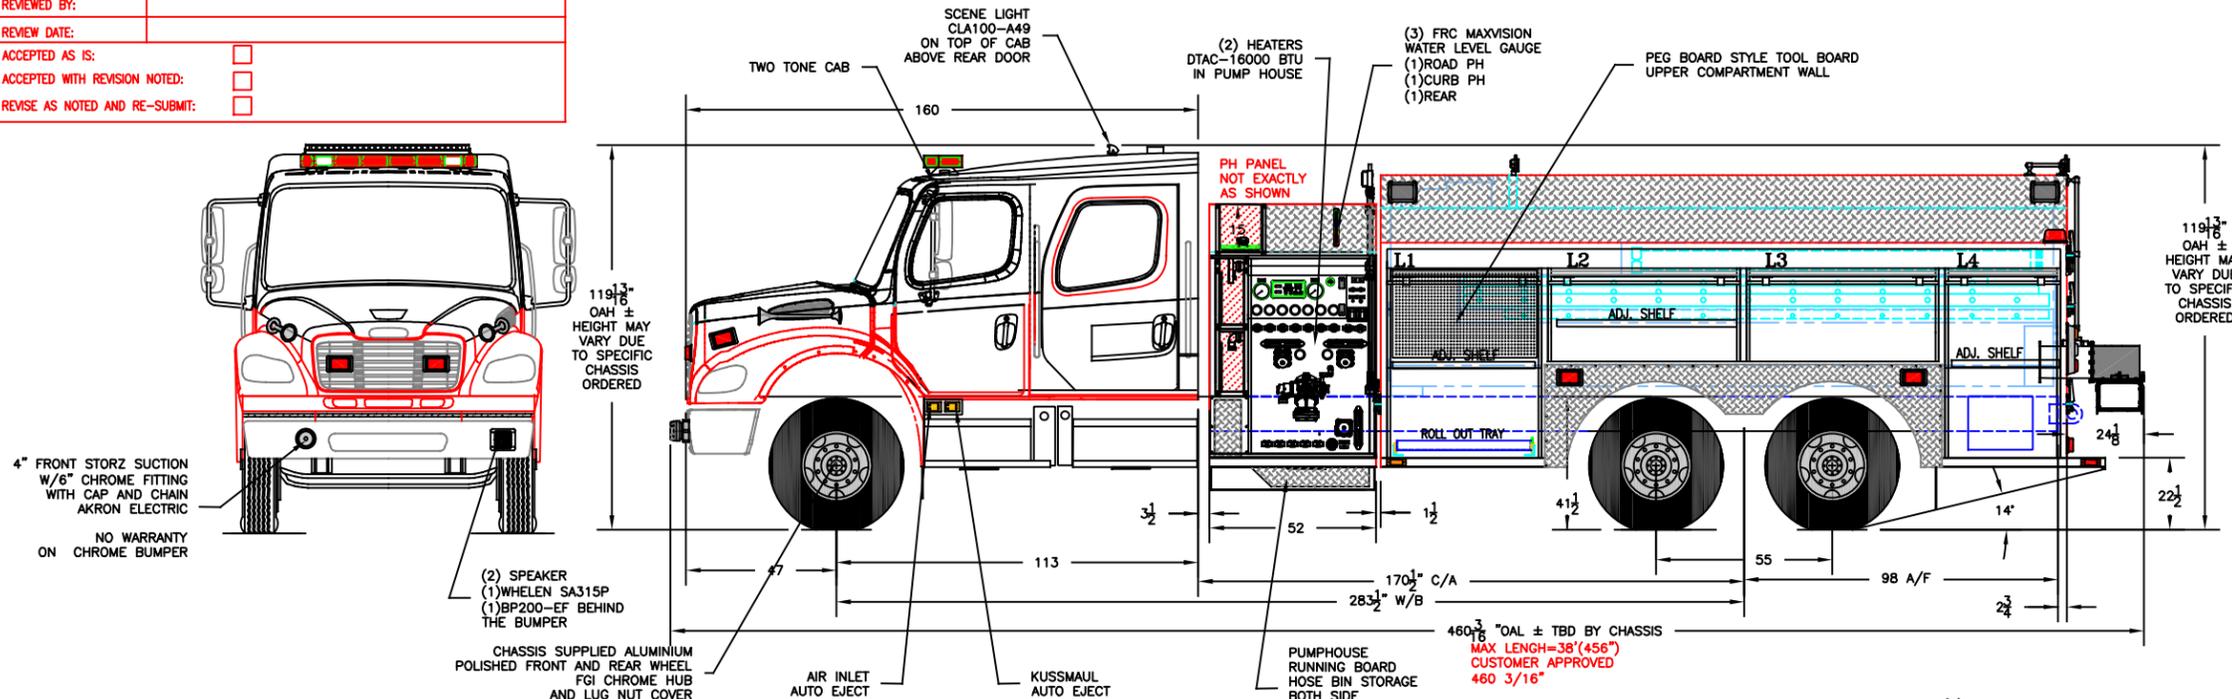

COMPT.	COMPARTMENT FRAME DIMENSIONS
L1/R1	48.25W x 65H x 13.5/26D
L2/R2	60W x 35H x 13.5D
L3/R3	60W x 35H x 13.5D
L4/R4	36W x 65H x 13.5/26D

1. THE DRAWING IS FOR REFERENCE PURPOSE, ONLY. THE DRAWING MAY OR MAY NOT SHOW ALL ITEMS AS DESCRIBED IN THE WRITTEN DETAILED SPECIFICATION.
2. INCLUSION OF AN ITEM ON THE DRAWING DOES NOT CONSTITUTE INCLUSION OF THAT ITEM WITH THE FINAL DELIVERY OF THE UNIT. SPECIFICATION SHALL BE FINAL AUTHORITY TO BE DETERMINED WHAT IS SUPPLIED ON THE APPARATUS.
3. THE EFFECTIVE DOOR OPENING FOR ROLLUP DOORS WILL BE REDUCED APPROX. 10" IN HEIGHT, 2" IN DEPTH AND 2" IN WIDTH FROM SHOWN FRAME OPENINGS AND 2" IN HEIGHT, 3" IN DEPTH AND UP TO 4" IN WIDTH FOR PAN DOORS. DIMENSIONS TOLERANCE ± 1/4"
4. PUMP RATING AND TANK CAPACITY ARE SHOWN AS NOMINAL VALUES. THE ACTUAL VALUES MAY VARY.
5. CHASSIS GVWR SHOWN IS THE MINIMUM REQUIRED FOR STANDARD BODY DEPENDING OF OPTIONS, GVWR MAY NEED TO BE INCREASED.
6. COMMERCIAL OEM CAB STEPS MAY NOT MEET ULC STANDARD. SELECT CUSTOM STEPS WHEN REQUIRED
7. OVERALL HEIGHT IS IN LOADED CONDITION, UNLOADED HEIGHT MAY BE 4" ABOVE HEIGHT SHOWN. AFTER TRUCK IS COMPLETED ADDITIONAL STEPS MAY BE REQUIRED TO MEET THE STANDARD.
8. DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO CHANGE AS MAY BE FOUND NECESSARY DURING DESIGN. DO NOT SCALE DRAWING.
9. MINOR DETAILS AND REFLECTIVE STRIPING ARE NOT SHOWN.

THIS DRAWING IS PROPERTY OF FORT GARRY FIRE TRUCKS LTD (FGFT) AND MUST NOT BE COPIED OR REPRODUCED IN WHOLE OR IN PART, BY ANY METHOD WHATSOEVER, WITHOUT AUTHORIZATION OF FGFT.

B	CUSTOMER SIGN OFF DRAWING	SP	27 NOV 2021
A	CRM DRAWING		
REV	DESCRIPTION OF CHANGE	BY	DATE

FORT GARRY
FIRE TRUCKS
WWW.FGFT.COM
WINNIPEG, MANITOBA, CANADA 1-800-565-3473

DESCRIPTION:	PLEASANT SQUARE F.D.		
SCALE:	1:55	DWG. BY:	TV
		CHK. BY:	

MODEL:	APTTS20H5	SHEET:	1 OF 1
DATE:	16 MAR 2021	DWG. NO. :	J0240